




Preliminary Product Notification

Sunamp Central Bank[®] Mini (P89)

Thermal storage solution for decarbonising heating and hot water

Central Bank Mini (P89) is an advanced and compact thermal battery using Phase Change Material (PCM). Central Bank Mini (P89) contains our Plentigrade (P89) material and a powerful heat exchanger and is suitable for hot water production, heating, district heating applications and as sink source for hotter temperatures.

Central Bank Mini (P89) has two independent hydronic circuits, high power (HPC) and low power (LPC) which can be configured to suit the application.

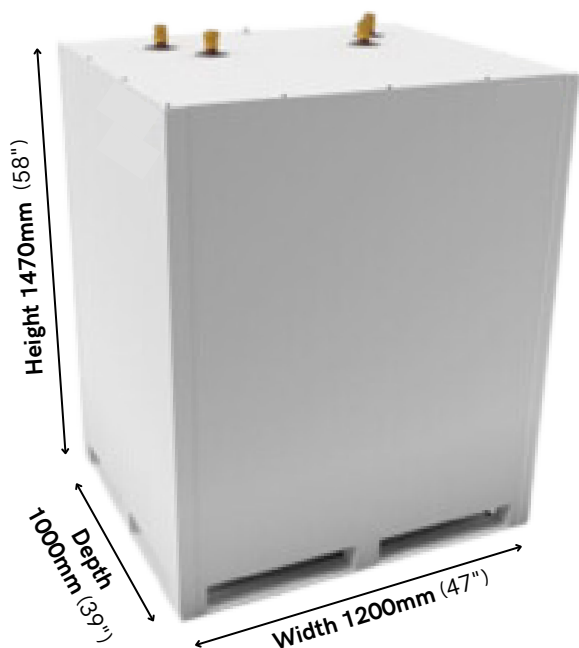

Typically during the charging period, the return temperature will be close to the phase change material temperature. Figures will differ according to application.

¹ You should achieve this temperature or lower to ensure that the latent storage capacity of the cold battery is fully used

² Reference conditions 65 - 95 °C (149 - 203 °F)

³ Reference conditions 20 °C (68 °F)

⁴ Calculated using US gallons.

Charging source temperature

Maximum flow - inlet	120 °C (248 °F)
Minimum flow - inlet	95 °C (203 °F)
Typical return - outlet - when charged	91 °C (195.8 °F) ¹

Discharging load temperature

Design flow - outlet	83.5 °C (182.3 °F)
Maximum inlet for discharging	75 °C (167 °F)

Nominal storage capacity ²	67 kWh (228 kBTU)
---------------------------------------	-------------------

Standby stored energy loss rate ³	5.83 kWh/24h (19.9 kBTU/24h)
--	---------------------------------

Weight	1,553 kg (3,424 lbs)
--------	----------------------

Minimum flow rates


Low power circuit (LPC)	15 l/min (4 gal/min)
High power circuit (HPC)	21 l/min (5.5 gal/min)

Maximum flow rates

Low power circuit (LPC)	40 l/min (10.6 gal/min) ⁴
High power circuit (HPC)	50 l/min (13 gal/min)

Maximum working pressure (hydraulic circuit)

1.6 MPa (16 bar)



Sunamp Limited, 1 Satellite Park, Macmerry, East Lothian, EH33 1RY, Scotland, UK info@sunamp.com +44 (0)1875 610001

As an innovative company committed to achieving net zero, Sunamp Ltd continuously improves its products which means data and other information are subject to change without prior notice. While every effort has been made to ensure that all specifications and descriptions are correct at the time of going to press, this brochure should not be regarded as an infallible guide nor as an offer of sale for a particular product. Always refer to the latest version of this document, other information and our latest terms and conditions which are available to view and download at www.sunamp.com

www.sunamp.com

aax-uk-cbm-p89-ppn-v2